



## PPF Technical Data Sheet


**Model: Endura ULTIMATE**

### Product Description:

**Endura ULTIMATE :**

TPU material protective film which produced by acrylic glue and secondary coating. This product has the characteristics of firm paste, anti yellowing 8 years, weather resistance, good anti-corrosion resistance and strong self healing ability.

### Product structure:

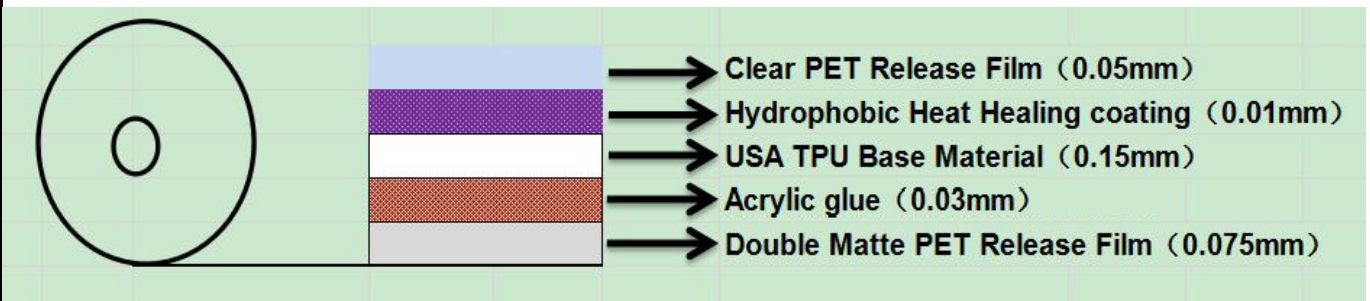

### Application Areas:

Widely used in automobiles, high-end motorcycles, high-end bicycles, ships, etc.

### Features:

1	Anti-Yellowing
2	Anti-Scratch
3	Anti-Fouling
4	Anti- Corrosion
5	High Glossy(up 40%)
6	Heat Self Healing
7	Hydrophobic
8	Easy Installation

## Material Properties:

Item	Unit	Data	Reference standards	
<b>Using Layer Thickness</b>	mm	0.19±0.003	GB/T7125-2014	
<b>Physical Properties</b>	Adhesion to steel plates Peel off at 180° and leave	gf/25mm	>800	GB/T2792-2014
	Transmittance	—	≥90	GB/T2410-2008
	Haze	—	≤1	GB/T2410-2008
	Special coatings	mm	0.01	GB/T7125-2014
<b>Raw Material</b>	USA Argotec	microns	150	—
<b>Glue</b>	USA Ashland	microns	10	—
<b>Coating</b>	Japan Nano Coating	microns	30	—
<b>Color</b>	Sticker	—	Clear	—
	Release Material	—	Matte	—
	Protective Material	—	Clear	—
<b>Warranty</b>	The original packaging, 6 months from the date of shipment, Stored in a temperature and humidity environment of 21±2°C, 50±5%.			

## Size:

Thickness (mm)	Width (mm)	Length (m)
0.315	1524	15

Remark: Other sizes (width, extra length) are available, please contact us